





Filter type:	SL160
Connection diameter:	3/4 "
Average flow rate (m³/h):	3 at ΔP 0,2 bar
Working pressure (bar):	8
Max. operating pressure (bar):	12
Max. operating temperature (°C):	50
Weight (kg):	0,68 / 0,8 (with packaging)
Packaging in mm (L x W x H):	180 x 140 x 125
Quantity / pallet (units):	336
Filter head:	Polypropylene (PP)
Bowl:	SAN
Filtering support:	PP + 20% GF
Wrench:	ABS
Seals:	O-ring butadiene-acrylonitrile (NBR)
Centrifugal vane + cap:	Polyethylene (PE)
Filtering sleeve:	Polyester
Filtration surface (cm²):	170
Original equipment:	Filtering sleeve 25 µm, wrench, wall fixation in PP + 30% GF
Filtering fineness available (µm):	Non-washable: 5 - 10 - 25 - 50 - 100
(packs of 5 sleeves)	

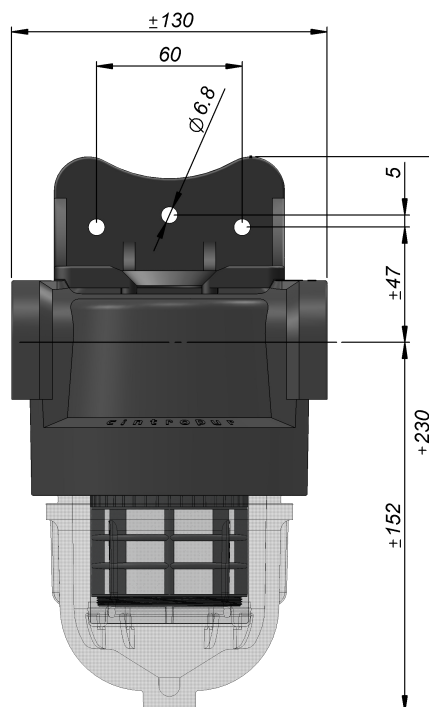

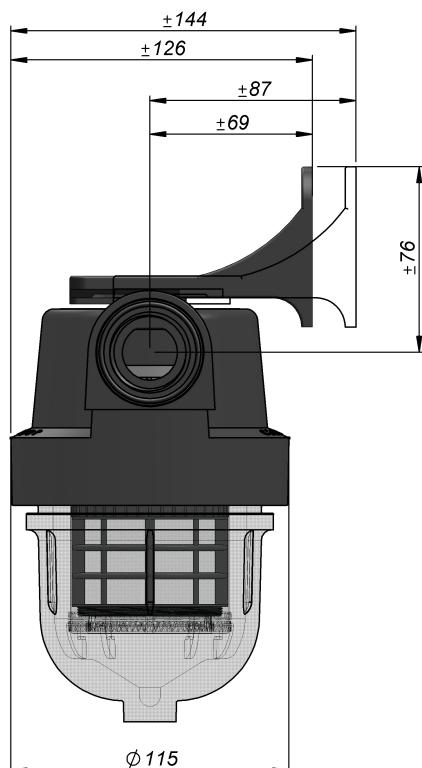

Filter type:	SL240
Connection diameter:	¾" or 1"
Average flow rate (m³/h):	3,5 (¾") – 4,5 (1") at ΔP 0,2 bar
Working pressure (bar):	8
Max. operating pressure (bar):	12
Max. operating temperature (°C):	50
Weight (kg):	0,9 / 1,05 (with packaging)
Packaging in mm (L x W x H):	320 x 130 x 130
Quantity / pallet (units):	171
Filter head:	Polypropylene (PP)
Bowl:	SAN
Filtering support:	PP + 20 % GF
Seals:	O-ring butadiene-acrylonitrile (NBR)
Centrifugal vane + cap:	Polyethylene (PE)
Filtering sleeve:	Polyester (non washable) or nylon (washable)
Wrench:	ABS
Filtration surface (cm²):	440
Original equipment:	Filtering sleeve 25 µm, wrench, wall fixation in PP + 30% GF
Filtering fineness available (µm):	Non-washable : 1 - 5 - 10 - 25 - 50 - 100
(packs of 5 sleeves)	Washable : 150 - 300

