cintropur®
WATERFILTRATION & TREATMENT

Technical Datasheet

Filter type:	**SL240 DUO-CTN**
Connection diameter:	¾ ” or 1”
Average flow rate (m³/h):	0,5 at ΔP 0,2 bar
Working pressure (bar):	8
Max. operating pressure (bar):	12
Max. operating temperature (°C):	50
Weight (kg):	1,85 / 2,37 (with packaging)
Packaging in mm (L x W x H):	320 x 261 x 118
Quantity / pallet (units):	72
Filter head:	Polypropylene (PP)
Bowl:	SAN
Wrench:	ABS
Filtering support:	PP + 20% GF
Seals:	O-ring butadiene-acrylonitrile (NBR)
Centrifugal vane + cap:	Polyethylene (PE)
Filtering sleeve:	Polyester (non-washable) or nylon (washable)
Filtration surface + capacity:	440 cm² with sleeve + 0,57L with activated carbon
CTN container for activated carbon:	SAN (corps) 0,6 mm + PP avec 20% GF (couvercle) 0,3mm
Original equipment:	Filtering sleeve 25 µm, CTN filled with activated carbon, wrench, 2 wall fixations in PP + 30% GF
Filtering fineness available (µm): (packs of 5 sleeves)	Non-washable : 1 - 5 - 10 - 25 - 50 - 100 Washable : 150 - 300

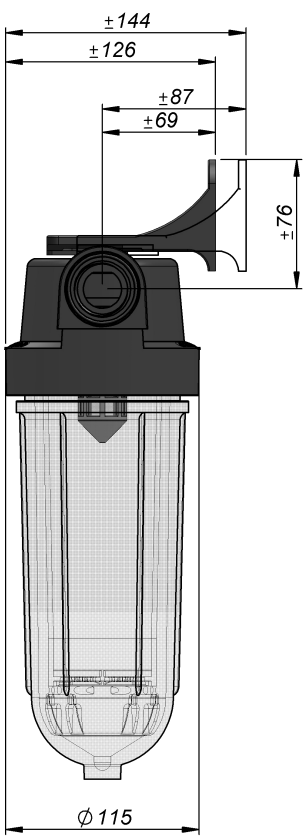

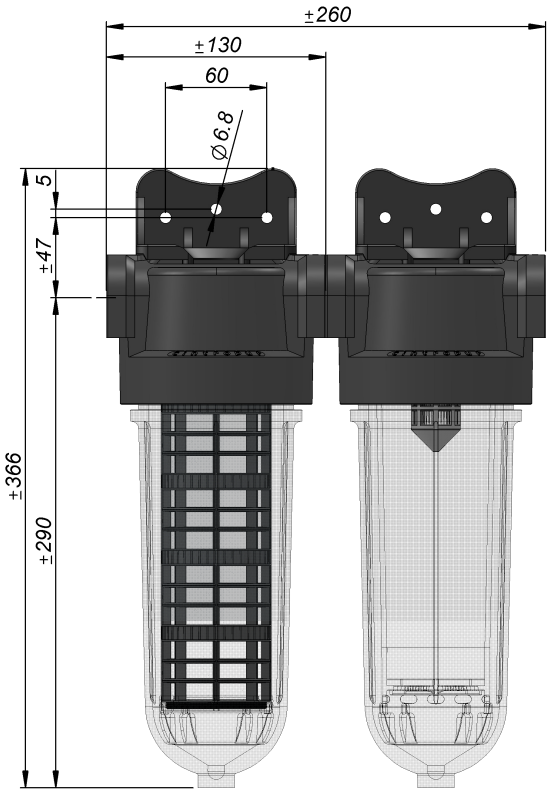

Airwatec SA | Hochstrasse 104d |4700 Eupen | Belgium
T.: +32 87 59 83 30 | F.: +32 87 59 84 40 | E.: info@airwatec.com
VAT/BTW BE 0464.530.129 | www.airwatec.com