cintropur®
WATERFILTRATION & TREATMENT

Technical Datasheet

Filter type:	**SL240 TE-CTN**
Connection diameter:	¾'' or 1"
Average flow rate (m³/h):	0,5 at ΔP 0,2 bar
Working pressure (bar):	8
Max. operating pressure (bar):	12
Max. operating temperature (°C):	50
Weight (kg):	1,23 / 1,42 (with packaging)
Packaging in mm (L x W x H):	320 x 130 x 130
Quantity / pallet (units):	171
Filter head:	Polypropylene (PP)
Bowl:	SAN
Wrench:	ABS
Seals:	O-ring butadiene-acrylonitrile (NBR)
CTN container capacity (litres):	0,57
CTN container for activated carbon:	SAN (body) 0,6 mm + PP with 20% GF (cap) 0,3mm
Original equipment:	CTN filled with activated carbon, wrench, wall fixation in PP + 30% GF

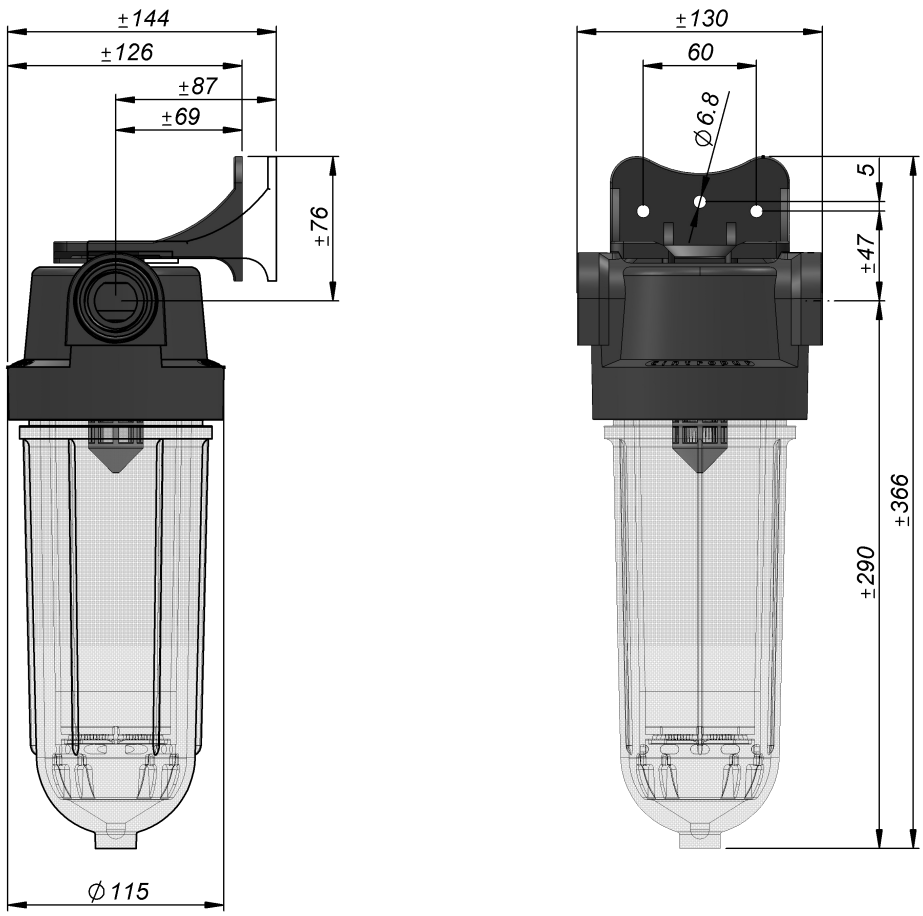

Airwatec SA | Hochstrasse 104d |4700 Eupen | Belgium
T.: +32 87 59 83 30 | F.: +32 87 59 84 40 | E.: info@airwatec.com
VAT/BTW BE 0464.530.129 | www.airwatec.com