



SENSORS &
CONTROLLERS



ANALYZERS
& SAMPLERS



LEVEL, FLOW
& PRESSURE



WEB APP &
DATA LOGGING



ACCESSORIES

PSS3 DATASHEET

PRESSURIZED INSERTION PROBEHOLDER



MAIN FEATURES

- Max slant 45° in the direction of the flow
- Vertical to slanted position
- Allows to immerse the probe directly into the pipe where the sample to be measured passes


APPLICATIONS

- Swimming pool
- Wastewater
- Cooling tower
- Irrigation

TECHNICAL DATA

Connection	½" G.M.
Sensor connection	PG 13.5 o Ø 12mm
Maximum Temperature	60°C
Maximum Pressure	7 bar
Materials	PVC

DIMENSIONS

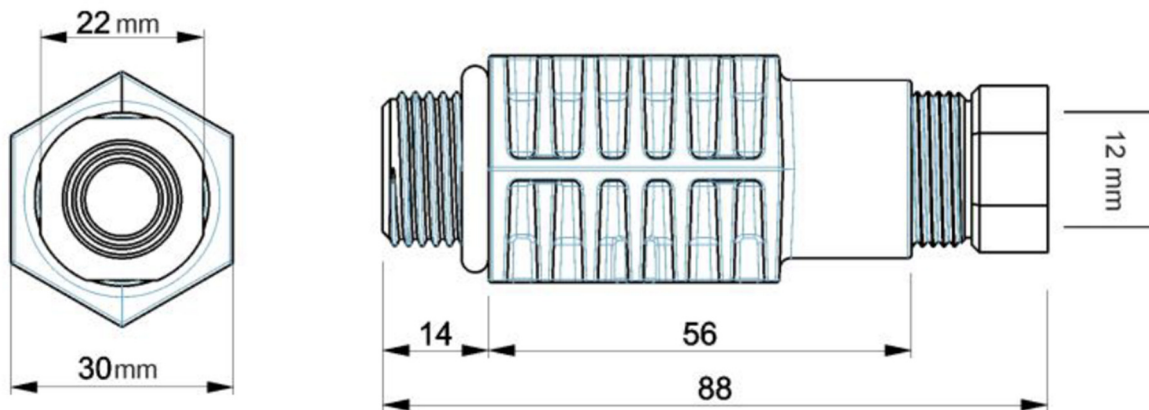

ORDER CODE

9900106670	PSS3 Pressurized Sensor Holder
------------	--------------------------------