



SENSORS &
CONTROLLERS



ANALYZERS
& SAMPLERS



LEVEL, FLOW
& PRESSURE



WEB APP &
DATA LOGGING



ACCESSORIES

SPP DATASHEET

PRESSURIZED SENSOR HOLDER



MAIN FEATURES

- Max slant 45° in the direction of the flow
- Vertical to slanted position
- Allows to immerse the sensor directly into the pipe where the sample to be measured passes
- Max pressure 16 bar
- Max temperature at 60°C


APPLICATIONS

- Swimming pool
- Wastewater
- Cooling tower
- Irrigation

TECHNICAL DATA

Connection	1" G.F.
Sensor connection	PG 13.5
Maximum Temperature	60°C
Maximum Pressure	16 bar
Materials	PP e PVC

DIMENSIONS

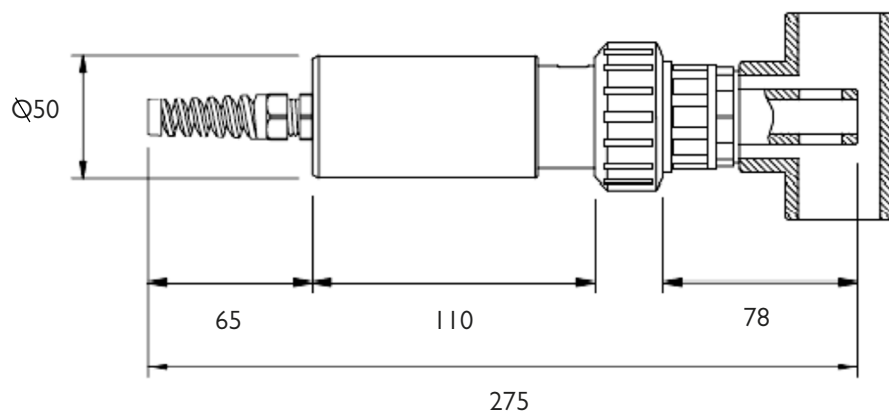

ORDER CODES

9400410084	SPP Pressurized Sensor Holder
------------	-------------------------------